

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 25/40, BPR 25/40 D



Robust and reliable
Best component protection



Precise and save to operate
BOMAG single lever control



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in m3

BPR 25/40 0,385


BPR 25/40 D 0,432

Standard Equipment

- ☒ Protective engine covering
- ☒ Single lever control
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Fully protected V-belt
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Automatic shutdown at low oil level (BPR25/40)
- ☒ Automatic decompression (BPR25/40D)
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+13kg)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Transport wheels, puncture-proof (+4kg)
- ☐ Service Kit
- ☐ US Version EPA 4 NRTC (BPR25/40D)
- ☐ TOUGH WARRANTY

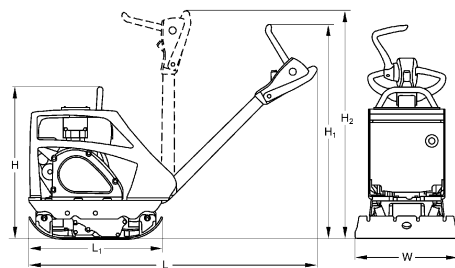

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 25/40	660	870	1220	1460	650	400
BPR 25/40 D	740	870	1220	1460	650	400

Technical Data

Weights

Operating weight CECE (W)	kg	135
Basic weight	kg	132

Dimensions

Basic working width	mm	400
Lowest passing height	mm	660
Min. height w. steering in top position	mm	870
Max. height w. steering in top position	mm	1.200

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda	Hatz
Type	GX 160	1B20
Emission stage	CARB Phase III	non EPA
Cooling	air	air
Number of cylinders	1	1
Performance SAE J 1349	kW	3,1
Speed	min-1	3.000
Drive system	mech.	mech.
Fuel	gasoline	diesel
Fuel comsump. aver. during operation	l/h	0,7

Exciter system

Frequency	Hz	85
Centrifugal force	kN	25
Amplitude	mm	1,55

Capacities

Fuel	l	3,1
Water	l	12,0

Technical modifications reserved. Machines may be shown with options.

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

